

RST® MICRO

SMALL – SMALLER – MICRO

The innovative connector for lighting technology.



Can be integrated in feed-through holes of 14 mm and M14 x 1 threads.


YOUR BENEFIT

- + Available with cable assemblies
- + Connector diameter 14.9 mm
- + Applications up to 250/400 V; 8 A
- + Wire cross sections 0.2 - 1.0 mm²
- + Distribution block with two or three outputs in parallel and serial wiring




ADDITIONAL PROTECTION DUE TO CONTACT SEAL

Available in barrier seal design, with each single contact featuring internal sealing.

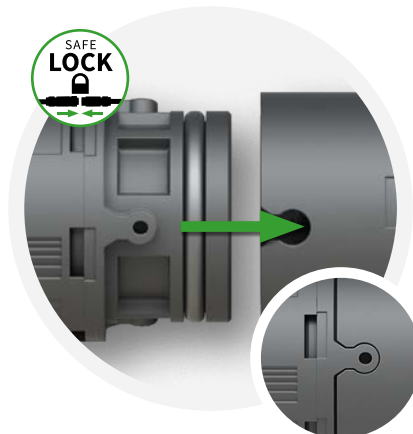

FAST AND RELIABLE CONNECTIONS

The interlock engages the connectors automatically when they are plugged together.

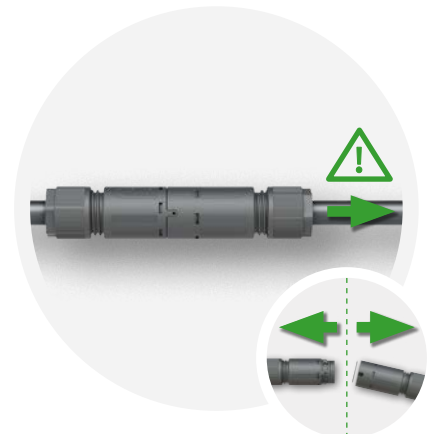

SAFETY LOCK – FOR A SAFE HOLD

With 60 N the connection guarantees a firm connection. In case of unplanned high tensile load on the connectors, they disengage to avoid the danger of pulling out of the connector.

RST® MICRO | OVERVIEW PART NUMBERS

FEMALE CONNECTOR



Color of coding	Application	Pole marking	Part No.	
			Without contact seal	With contact seal
● Black	250/400V	1, 2/N, PE	41.031.3053.1	4L.031.3053.1
● Black	250/400V	1, 2/N ¹⁾	41.021.3043.1	4L.021.3043.1
● light blue	250/400V	1, 2/N, 3	41.031.3043.9	4L.031.3043.9
● light blue	250/400V	1, 2/N ¹⁾	41.021.3043.9	4L.021.3043.9
● slate gray	~50/-120V	1, 2, 3	41.031.3041.4	4L.031.3041.4
● slate gray	~50/-120V	1, 2 ¹⁾	41.021.3041.4	4L.021.3041.4
● pebble gray	~50/-120V	1, 2 ¹⁾	41.021.3041.8	4L.021.3041.8
● pebble gray	~50/-120V	1, 2, PE	41.031.3051.8	4L.031.3051.8

MALE CONNECTOR



Color of coding	Application	Pole marking	Part No.	
			Without contact seal	With contact seal
● Black	250/400V	1, 2/N, PE	41.032.3053.1	4L.032.3053.1
● Black	250/400V	1, 2/N ¹⁾	41.022.3043.1	4L.022.3043.1
● light blue	250/400V	1, 2/N, 3	41.032.3043.9	4L.032.3043.9
● light blue	250/400V	1, 2/N ¹⁾	41.022.3043.9	4L.022.3043.9
● slate gray	~50/-120V	1, 2, 3	41.032.3041.4	4L.032.3041.4
● slate gray	~50/-120V	1, 2 ¹⁾	41.022.3041.4	4L.022.3041.4
● pebble gray	~50/-120V	1, 2 ¹⁾	41.022.3041.8	4L.022.3041.8
● pebble gray	~50/-120V	1,2, PE	41.032.3051.8	4L.032.3051.8

DEVICE CONNECTOR M14 FEMALE CONNECTOR



Color of coding	Application	Pole marking	Part No.	
			Without contact seal	With contact seal
● Black	250/400V	1, 2/N, PE	41.031.4053.1	4L.031.4053.1
● Black	250/400V	1, 2/N ¹⁾	41.021.4043.1	4L.021.4043.1
● light blue	250/400V	1, 2/N, 3	41.031.4043.9	4L.031.4043.9
● light blue	250/400V	1, 2/N ¹⁾	41.021.4043.9	4L.021.4043.9
● slate gray	~50/-120V	1, 2, 3	41.031.4041.4	4L.031.4041.4
● slate gray	~50/-120V	1, 2 ¹⁾	41.021.4041.4	4L.021.4041.4
● pebble gray	~50/-120V	1, 2 ¹⁾	41.021.4041.8	4L.021.4041.8
● pebble gray	~50/-120V	1,2, PE	41.031.4051.8	4L.031.4051.8

DEVICE CONNECTOR M14 MALE CONNECTOR



Color of coding	Application	Pole marking	Part No.	
			Without contact seal	With contact seal
● Black	250/400V	1, 2/N, PE	41.032.4053.1	4L.032.4053.1
● Black	250/400V	1, 2/N ¹⁾	41.022.4043.1	4L.022.4043.1
● light blue	250/400V	1, 2/N, 3	41.032.4043.9	4L.032.4043.9
● light blue	250/400V	1, 2/N ¹⁾	41.022.4043.9	4L.022.4043.9
● slate gray	~50/-120V	1, 2, 3	41.032.4041.4	4L.032.4041.4
● slate gray	~50/-120V	1, 2 ¹⁾	41.022.4041.4	4L.022.4041.4
● pebble gray	~50/-120V	1, 2 ¹⁾	41.022.4041.8	4L.022.4041.8
● pebble gray	~50/-120V	1,2, PE	41.032.4051.8	4L.032.4051.8

DISTRIBUTION BLOCK



Color of coding	Application	Pole marking	Part No.	
			1 input / 2 outputs	1 input / 3 outputs
● Black	250/400V	1, 2/N, PE	4L.030.1153.1	4L.030.0153.1
● Black	250/400V	1, 2/N ¹⁾	4L.020.1143.1	4L.020.0143.1
● light blue	250/400V	1, 2/N, 3	4L.030.1143.9	4L.030.0143.9
● light blue	250/400V	1, 2/N ¹⁾	4L.020.1143.9	4L.020.0143.9
● slate gray	~50/-120V	1, 2, 3	4L.030.1141.4	4L.030.0141.4
● slate gray	~50/-120V	1, 2 ¹⁾	4L.020.1141.4	4L.020.0141.4
● pebble gray	~50/-120V	1, 2, PE	4L.030.1351.8	4L.030.0351.8
● pebble gray	~50/-120V	1, 2 ¹⁾	4L.020.1241.8	4L.020.0241.8



Wieland Electric GmbH
 Brennerstraße 10 – 14 · 96052 Bamberg · Germany
 Phone +49 951 9324-0 · info@wieland-electric.com

Represented in over 70 countries worldwide:

www.wieland-electric.com

¹⁾ One pole unassigned